

Take advantage of technology that scales and flexes as your business needs do. Be more productive and efficient with the IM C2000(A)/C2500(A) range of A3 colour devices.

Take advantage of:

- Print speeds of 20 25 ppm
- Easy-to-use 10.1" Smart Operation Panel with intuitive menu
- Mobile connectivity options including NFC, AirPrint* or Mopria
- Increased uptime and performance with RICOH Intelligent Support

Access a range of productivity features and upgrades -such as scanning directly to your email or dedicated folders on your network and ensure you have the latest security enhancements and mobile device connectivity options. Our intelligent devices are designed to do more as and when your business needs to, using technology that's scalable, secure, sustainable and simple.

Get more from your intelligent device:

- Tailor settings to individual users for quick access to apps used most often
- Scan smaller documents with the small size paper
- Work more efficiently with expanded paper tray capacity
- Automatic firmware upgrades providing maximum security


Ricoh's Intelligent devices remain current and relevant no matter what your workplace requires. This way, you have ready and easy access to new functionality, when needed. Environmentally-friendly low TEC (Typical Electricity Consumption) values, deliver reduced energy consumption and cut running costs. While RICOH Intelligent Support features such as Predictive Maintenance mean that device performance is monitored and any fixes resolved swiftly, minimising impact on your workplace.

Ready to take a swipe at a faster way to work? Our range of intelligent devices come fitted with a 10.1" Smart Operation Panel designed to enhance your productivity, mobility and environmental commitment. Experience a user interface that offers fast and simple navigation with the ability to customise the layout to best suit your needs - even by adding your own company branding. Access device features, move between jobs and tasks quickly and conveniently enabling teams to work smarter.

All intelligent devices provide:

- Quick access to Web Help Tools via RICOH Intelligent Support
- Consistent user interface and experience across your
 Ricoh fleet
- Easy integration with third party solutions
- Regular functionality upgrade releases to do more, smarter and faster

IM C2000(A) / IM C2500(A) hardware configuration

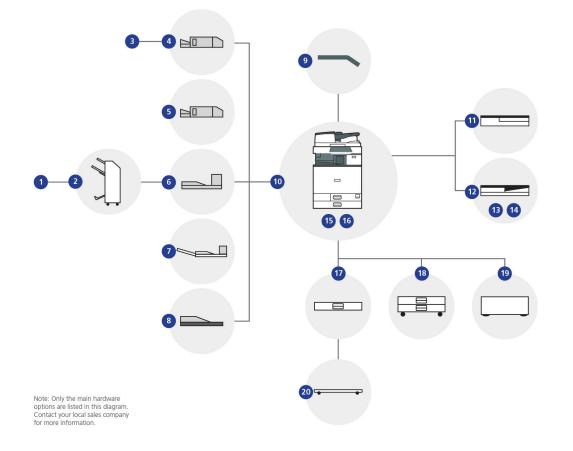

1 Punch unit NA/EU/SC PU3080 2 1,000-sheet booklet finisher SR3270 3 Punch unit NA/EU/SC PU3070 500-sheet internal finisher SR3250 250-sheet staple-free internal finisher SR3300 6 Bridge unit BU3090 7 Side tray Type M37 8 Internal shift sort tray SH3080 9 1-bin tray BN3130 10 IM C2000(A) and IM C2500(A) ARDF (IM C2000 / IM C2500) 12 SPDF (IM C2000(A) / IM C2500(A)) Small paper feeding unit Type M37 14 Double Sided Detection Unit Type M37 15 Fax Type M37 16 Banner paper guide tray Type M19 17 550-sheet paper bank PB3270 18 2 x 550-sheet paper bank PB3300 19 Low Cabinet 54 20 Caster table 39

RICOH IM C2000A/IM C2000/IM C2500A/IM C2500

Main specifications

GENERAL	IM C2000A	IM C2000	IM C2500A	IM C2500		
Warm-up time		21 s	seconds			
First output speed: B/W			seconds			
First output speed: full colour			seconds			
Continuous output speed	20 nnm		25 ppm	25 ppm		
Memory: standard	20 ppm	20 ppm	25 ppm	25 ррпі		
Memory: maximum						
IDD: standard	4 GB					
IDD: standard IDD: maximum	320 GB 320 GB					
RDF capacity			sheets			
PDF capacity			sheets			
Veight	96.4 kg	91 kg	96.4 kg	91 kg		
imensions: W x D x H ower source	587 x 685 x 963 mm	587 x 685 x 913 mm	587 x 685 x 963 mm V. 50 - 60 Hz	587 x 685 x 913 mm		
ower source		220 - 240	V, 50 - 60 FIZ			
OPIER						
fultiple copying	Up to 999 copies					
Resolution		60	00 dpi			
'oom		From 25% to 4	400% in 1% steps			
RINTER						
CPU	ApolloLake E3930 1.3 GHz					
Printer language: standard		•				
rinter language: option	PCL5c, PCL6, PostScript 3 (emulation), PDF direct (emulation)					
	Genuine Adobe® PostScript®3™, PictBridge, PDF Direct from Adobe®					
Print resolution: maximum	1,200 x 1,200 dpi					
letwork interface: standard	Ethernet 10 base-T/100 base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B					
letwork interface: option	Bi-directional IEEE 1284, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port)					
Nobile printing capability	Apple AirPrint, Mopria®, NFC, Ricoh Smart Device Connector					
Vindows® environments	Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows® Server 2012R2 Windows® Server 2016, Windows® Server 2019					
Mac OS environments	Macintosh OS X Native v10.11 or later					
JNIX environments	UNIX Sun® Solaris, HP-UX, SCO OpenServer, RedHat® Linux Enterprise, IBM® AIX					
SAP® environments	SAP® S/4®					
Other supported environments		IBM	iSeries			
SCANNER						
Scanning speed: ARDF		80 ipm (3	200/300 dpi)			
Scanning speed: SPDF	120 ipm (simplex)/240 ipm (duplex)					
Resolution: maximum	1,200 dpi					
File formats	Single Page TIFF Single na		•	lulti nage PDF Multi nage Hid		
iic iorridis	Single Page TIFF, Single page JPEG, Single page High compression PDF, Multi page TIFF, Multi page PDF, Multi page Hig compression PDF, Multi page PDF/A					
Scan modes	E-mail, Folder, USB, SD Card					
AX						
Circuit		PST	N, PBX			
ransmission speed	2 seconds					
Nodem speed: maximum	33.6 Kbps					
tesolution: standard	8x3.85 line/mm, 200x100 dpi					
esolution: option		16x15.4 line/r	mm, 400x400 dpi			
ompression method		MH, MR,	MMR, JBIG			
canning speed	81 spm	68 spm	81 spm	68 spm		
lemory: standard		4 MB, (320 pages)			
emory: maximum		60 MB, (4	4,800 pages)			
APER HANDLING						
ecommended paper size	5	Standard paper tray(s): SRA3, A	3, A4, A5, A6, B4, B5, B6, Envelop	oes		
			B, A4, A5, A6, B4, B5, B6, Envelop			
	Bypas	ss tray: SRA3, A3, A4, A5, A6, B	4, B5, B6, Envelopes, Custom Siz	re paper		
aper input: standard		1,20	0 sheets			
	2,300 sheets					
aper input: maximum	500 sheets					
		500	sheets			
aper output: standard						
Paper output: standard Paper output: maximum	Tro	1,62	5 sheets	g/m²)		
Paper input: maximum Paper output: standard Paper output: maximum Paper weight Paper types		1,62 ays: (60 - 300 g/m²), Bypass: (5				

RICOH IM C2000A/IM C2000/IM C2500A/IM C2500

Main specifications

	IM C2000A	IM C2000	IM C2500A	IM C2500	
ECOLOGY					
Power consumption: max.	Less than 1,700 W				
Power consumption operation: B&W	415.9 W	415.9 W	451.5 W	451.5 W	
Power consumption operation: Full colour	465.2 W	465.2 W	497.1 W	497.1 W	
Power consumption: ready	46.2 W				
Power consumption: sleep	0.55 W				
TEC* * It is a reference value based on the ENERGY STAR Ver.3.0 test	0.24 kWh/week	0.24 kWh/week	0.28 kWh/week	0.28 kWh/week	





Bluetooth











RICOH @Remote

OUTPUT TRAYS AND FINISHER OPTIONS

1x 550-sheet paper tray	Paper size: (SRA3, A3, A4, A5, A6, B4, B5, B6), Paper weight: (60-300 g/m²)
2x 550-sheet paper tray	Paper size: (SRA3, A3, A4, A5, A6, B4, B5, B6), Paper weight: (60-300 g/m²)
1,000-sheet Booklet finisher	Paper size: (SRA3, A3, A4, A5, A6, B4, B5, B6), Paper weight: (52-300 g/m²), Stack capacity: (1,000 sheets), Staple capacity: (50 sheets), Staple paper size: (A3, A4, B4, B5), Staple paper weight: (52-105 g/m²), Staple positions: (Top, Bottom, 2 staples, Booklet)
250-sheet Internal finisher	Paper size: (A3, A4, A5, A6, B4, B5), Paper weight: (52-300 g/m²), Stack capacity: (250 sheets), Staple capacity: (5 sheets), Staple paper size: (A3, A4, B4, B5), Staple paper weight: (64-80 g/m²), Staple positions: (Top)
500-sheet Internal finisher	Paper size: (A3, A4, A5, A6, B4, B5), Paper weight: (52-300 g/m²), Stack capacity: (500 sheets), Staple capacity: (50 sheets), Staple paper size: (A3, A4, B4, B5), Staple paper weight: (52-105 g/m²), Staple positions: (Top, Bottom, 2 staples)
Internal shift tray	Tray capacity: (250 sheets), Paper size: (SRA3, A3, A4, A5, A6, B4, B5, B6), Paper weight: (52-300 g/m²)
One-bin tray	Tray capacity: (125 sheets), Paper size: (A3, A4, A5, B3, B4), Paper weight: (52-300 g/m²)

OTHER OPTIONS

Fax unit, G3 Interface, Fax connection unit, Fax memory unit, Cabinet, Caster table, VM card, Memory unit, Side Tray, Punch units, Camera direct print card, PostScript 3, Bi-directional IEEE 1284, IEEE 802.11 a/g/n, Device server unit, File format converter, OCR unit, Enhanced security HDD, Data overwrite security unit, Small paper feeding unit, Page keeper, Imageable area extension unit, ADF handle, External keyboard bracket, Counter I/F unit, Key counter bracket, NFC card reader, Smart card reader built-in unit

CONSUMABLES

Toner (black) 16,500 prints

Toner: cyan/magenta/yellow 10,500 prints

Consumable yield based on 2p/j
5% coverage on A4

*Airprint certification will be available in 2019.

COMMISSION REGULATION (EU) 2019/2020. The light source of this product is not intended for applications other than image printing.

Ricoh UK Ltd.

300 and 800 Pavilion Drive Northampton Business Park NN4 7YL Northampton United Kingdom



+44(0)1604 814900



www.ricoh.co.uk

