

Welcome to a new era of technology that keeps your workplace up-to-date, now and in the future. Smarter working made simple thanks to the IM C3000(A)/C3500(A).

### Now is the time to:

- Protect your devices with easy access to security updates
- Take advantage of easy productivity upgrades at your own pace
- Save costs by bringing high-standard quality print output in-house
- Maximise productivity with streamlined workflows

Today's workplace needs to be ready for tomorrow. Ricoh's intelligent devices provide smooth access to functionality upgrades and productivity enhancements when they are released, without needing to change your hardware. Turn your device into a powerful hub that helps you manage information workflows efficiently, using technology that's scalable, secure, sustainable and simple.

### Get greater control of scan and print management:

- Scan smaller documents with the small size paper scan unit
- Improve scan accuracy double feed detection unit
- Enhance print management with EFI controller
- Produce professional grade flyers with inner multifolding unit


Embrace lower running costs and reduced energy consumption thanks to environmentally friendly low TEC (Typical Electricity Consumption) values. Furthermore, take advantage of RICOH Intelligent Support services that anticipate potential issues and send corrective instructions via the Smart Operation Panel, avoiding interruptions and prolonging the optimal performance of your device – avoiding the need for intervention by more costly IT resources.

Printing from 30 to 35 CPM, the IM C3000(A)/C3500(A) offer next-level productivity. Interact with the 10.1" Smart Operation Panel like a typical smart device and configure it for quick and easy ac-cess to apps you use most often. A variety of mobile connectivity options enable printing or scan-ning to the office network or cloud from a smart device, with built-in support for NFC, AirPrint\* or Mopria. All this underpinned by a unique suite of support apps from RICOH Smart Integration.

### Our intelligent devices offer:

- Efficient working and reduced user intervention by expanding paper capacity
- Variable finishing and paper options for a professional touch
- A consistent user experience across your fleet
- Maximum device uptime and minimal disruption with RICOH Intelligent Support

# IM C3000(A) / IM C3500(A) hardware configuration

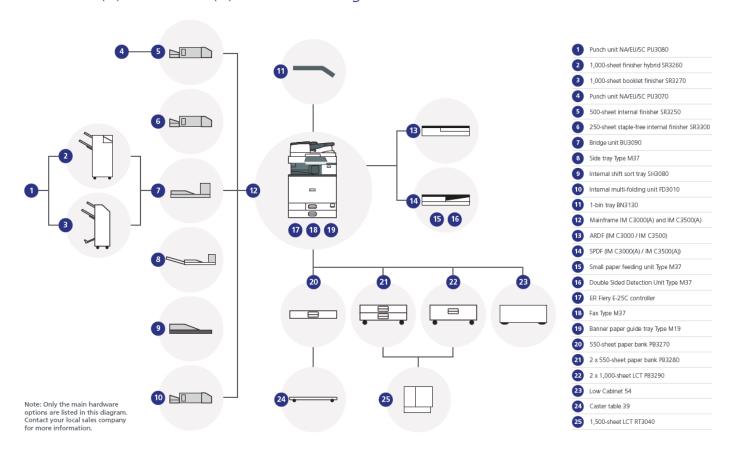

# RICOH IM C3000A/IM C3000/IM C3500A/IM C3500

MAIN SPECIFICATIONS

Mac OS environments         Macintosh OS x Native v10.11 or later           UNIX environments         Macintosh OS X Native v10.11 or later           UNIX environments         UNIX Sun® Solaris, HP-UX, SCO OpenServer, RedHat® Linux Enterprise, IBM® AIX           SAP® environments         SAP® R73®, SAP® S/4®           Other supported environments         IBM iSeries           SCANNER           Scanning speed: ARDF         80 ipm (200/300 dpi)           Scanning speed: SPDF         120 ipm (simplex)/240 ipm (duplex)           Resolution: maximum         1,200 dpi           Compression method         Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page High compression PDF, Multi page PDF/A           Scan modes         E-mail, Folder, USB, SD Card           FAX           Circuit         PSTN, PBX           Transmission speed         2 seconds           Modem speed: maximum         33.6 kbps           Resolution: standard         8x3.85 line/mm, 200x100 dpi           Resolution: option         H, MR, MMR, JBIG           Compression method         H, MR, MMR, JBIG           Ceaning speed         81 spm         68 spm           Memory: standard         4 MB, (320 pages)	GENERAL	IM C3000A	IM C3000	IM C3500A	IM C3500		
First output speed: EW    1.5 seconds   1.			2	1 nonondo			
First output speed; full colour   30 ppm   30 ppm   35	•						
Continuous output speed   30 ppm   30 ppm   30 ppm   2 GB   35 ppm   35 ppm   35 ppm   Memory: standard   4 GB							
Memory, standard		30 npm	-		35 ppm		
HDD: standard   320 GB		оо рр	оо рр		оо рр		
HDD: maximum	Memory: maximum			4 GB			
ARDIF capacity  SPIPE capacity  Weight  99.4 kg  80.00 kg  80.00 kg  90.00 kg  9	HDD: standard						
SPDIF capacity	HDD: maximum			320 GB			
Meight	ARDF capacity						
Dimesisins: W x D x H   587 x 685 x 963 mm   587 x 685 x 913 mm   587	SPDF capacity		2	20 sheets			
Power source         220 - 240 V, 50 - 60 Hz           COPIER           Multiple copying         Up to 999 copies           Resolution         600 dpi           Zoom         From 25% to 400% in 1% steps           PRINTER           CPU         ApolloLake E3930 1.3 GHz           Printer language: standard         PCL5c, PCL6, PostScript 3 (emulation), PDF direct (emulation)           Frinter language: option         Genuine Adobe® PostScript 30"*, PictBridge, PDF Direct from Adobe®           Printer solution: maximum         Revenue Transmitter (emulation)           Network interface: standard         Betwork interface: standard         Betwork interface: standard           Network interface: option         Be-directional IEEE 1284, Wireless LAN (IEEE 802.11ab/bgn), Additional NIC (2nd port)           Windows® environments         Bi-directional IEEE 1284, Wireless LAN (IEEE 802.11ab/bgn), Additional NIC (2nd port)           Moc OS environments         Windows® 58.1, Windows® 58.1, Windows® 58 erver 2008, Windows® Server 200	•	•					
Multiple copying Resolution Zoom From 25% to 400% in 1% steps  PRINTER  CPU ApolioLake E3930 1.3 GHz Printer language: standard Printer language: option Genuine Adobe® PostScript3 (emulation), PDF direct (emulation) Printer language: option Genuine Adobe® PostScript3 (emulation), PDF Direct from Adobe® Printer language: option Printer language: option Genuine Adobe® PostScript3 (emulation), PDF Direct from Adobe® Printer language: option Retwork interface: standard Retwork interface: option Mobile printing capability Windows® (emulation) Mobile printing capability Windows® (emulation) Windows® (emulation) Apple AliPrint, Mopris®, NFC, Ricoh Smart Device Connector Windows® (emvironments Windows® (emvironments) Windows® (emvironments) Windows® (emvironments) Windows® (emvironments) Windows® (emvironments) Windows® (emvironments) UNIX sun® Solaris, HP-UX, SCO OpenServer, RedHaft® Linux Enterprise, IBM® AIX SAP® environments UNIX sun® Solaris, HP-UX, SCO OpenServer, RedHaft® Linux Enterprise, IBM® AIX SAP® environments IBM Iseries  SCANNER  Scanning speed: ARDF Scanning speed: ARDF Scanning speed: SPDF Resolution: maximum Compression method File formats Single Page TIFF, Single page JPEG, Single page High compression PDF, Multi page PDF/A, Multi page TIFF, Multi page Fleformats  FAX  Circuit  PSTN, PBX Transmission speed  Modem speed: maximum Resolution: standard Resolution: standard Resolution: standard Resolution: standard Resolution: standard Resolution: maximum AN 3.8 Flinermm, 400x400 dpi Resolution: standard Resolution: dpicn AM, MR, MMR, JBIG AMB, MR, MR, MMR, JBI		587 x 685 x 963 mm			587 x 685 x 913 mm		
Resolution	COPIER						
Resolution	Multiple copying		Unit	o 999 copies			
PRINTER           CPU         ApolloLake E3930 1.3 GHz           Printer language: standard         PCL5c, PCL6, PostScript 3 (emulation, ) PDF direct (emulation)           Printer language: option         Genuine Adobe® PostScript®3™, PictBridge, PDF Direct (emulation)           Printer language: option         Genuine Adobe® PostScript®3™, PictBridge, PDF Direct from Adobe® PostScript®3™, PictBridge, PDF Direct from Adobe® PostScript®3™, PictBridge, PDF Direct from Adobe® Post Printer from Script® (emulation)           Network interface: standard Network inter			Орт	•			
PRINTER  CPU  ApolloLake E3930 1.3 GHz Printer language: standard Printer language: option Print resolution: maximum Network interface: standard Network interface: option Mobile printing capability Windows® environments Windows® 1, Windo			From 25% t	•			
Printer language: standard Printer language: standard Printer language: option Print resolution: maximum Network interface: standard Network interface: option Mobile printing capability Windows® ervironments Windows® 1.4, Windows® 1.4, Windows® Server 2008, Windo							
Printer language: standard Printer language: option Print resolution: maximum Printer language: option Print resolution: maximum Network interface: standard Network interface: standard Network interface: option Mobile printing capability Windows® environments Windows® 1, Windows® 1, Windows® 1, Windows® Server 2008, Windows® Se							
Printer language: option Print resolution: maximum Network interface: standard Network interface: option Mobile printing capability Windows® environments Windows® 7, Windows® 8, 1, Windows® 10, Windows® Server 2008, Win							
Print resolution: maximum Network interface: standard Network interface: option Mobile printing capability Windows® environments Windows® 7, Windows® 1, Windows® 1, Windows® 5, Windows®	• •						
Network interface: standard Network interface: option Network interface: option Network interface: option Neble printing capability Nindows® environments Nindows® 7, Windows® 8, 1, Windows® 10, Windows® Server 2008, Windows® Server 2008, Windows® Server 2008, Windows® Server 2008, Windows® Server 2018, Wind		G	· ·	•	obe®		
Network interface: option Mobile printing capability Mndows® environments Windows® 7, Windows® 8.1, Windows® 17, Windows® 5erver 2008, Windows® Server 2008, Windows® Server 2016, Windows® 7, Windows® 5erver 2016, Windows® 5erver 2008, Windows® Server 2016, Windows® 5erver 2008, Windows® Server 2018, Windows® 5erver 2018, Server 2018, Server 2018, Server 2018, Windows® 5erver 2018, Server 2018,							
Mobile printing capability Windows® environments Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows® Server 2016 Windows® Server 2016, Windows® Server 2016, Windows® Server 2018, Windows® Server 2012/2012/2012/2016, Windows® Server 2018 Mac OS environments Macintosh OS x Native v10.11 or later UNIX environments UNIX sun® Solaris, HP-UX, SCO OpenServer, RedHat® Linux Enterprise, IBM® AIX SAP® environments Other supported environments  SCANNER  Scanning speed: ARDF Scanning speed: ARDF Scanning speed: SPDF Scanning speed: PDF Scanning speed: SPDF Single page PDF/A, Multi page PDF/A Scan modes  Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page High compression speed: SPDF Scan modes  FAX  Circuit  PSTN, PBX Transmission speed Modem speed: maximum Sesolution: standard Resolution: standard Resolution: option MH, MR, MMR, JBIG Scanning speed 81 spm 68 spm Memory: standard MMR, 320 pages)							
Windows® environments Windows® 7, Windows® 10, Windows® Server 2008, Windows® Server 2018, Windows® Server 2018 Windows® Server 2016, Windows® 7/8.1/10, Windows® Server 2008/2012/2012R2/2016, Windows® Server 2018 Mac OS environments Macintosh OS X Native v10.11 or later UNIX Sun® Solaris, HP-UX, SCO OpenServer, RedHat® Linux Enterprise, IBM® AIX SAP® environments UNIX Sun® Solaris, HP-UX, SCO OpenServer, RedHat® Linux Enterprise, IBM® AIX SAP® R/3®, SAP® S/4® UNIX Sun® Solaris, HP-UX, SCO OpenServer, RedHat® Linux Enterprise, IBM® AIX SAP® environments  SCANNER  Scanning speed: ARDF Scanning speed: ARDF Scanning speed: SPDF Resolution: maximum Compression method File formats Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page High compression PDF, Multi page PDF/A Scan modes  FAX  Circuit PSTN, PBX Transmission speed Modem speed: maximum Resolution: standard Modem speed: maximum Resolution: standard Modem speed: maximum Resolution: option MH, MR, MIR, JBIG Scanning speed Memory: standard MH, MR, MMR, JBIG Scanning speed Memory: standard Memory: st							
Windows® Server 2016, Windows® 7/8.1/10, Windows® Server 2008/2012/2012R2/2016, Windows® Server 2018 Mac OS environments UNIX environments UNIX Sun® Solaris, HP-UX, SCO OpenServer, RedHat® Linux Enterprise, IBM® AIX SAP® environments Other supported environments  SCANNER  Scanning speed: ARDF Scanning speed: ARDF Scanning speed: PPDF Resolution: maximum Compression method File formats Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page High compression PDF, Multi page PDF/A Scan modes  FAX  Circuit PSTN, PBX Transmission speed Modem speed: maximum Sesolution: valume Sesolution: valume Sesolution: valume Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A Scan modes  FAX  Circuit PSTN, PBX Transmission speed Modem speed: maximum Resolution: standard Say 3.85 Ine/mm, 200x100 dpi Sesolution: option Compression method MH, MR, MIR, JBIG Scanning speed 81 spm 68 spm Memory: standard 4 MB, (320 pages)							
Mac OS environments UNIX environments UNIX Sun® Solaris, HP-UX, SCO OpenServer, RedHat® Linux Enterprise, IBM® AIX SAP® environments Other supported environments SCAP® environments SCAPNER  Scanning speed: ARDF Scanning speed: SPDF Scanning speed: SPDF Scanning speed: SPDF Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page High compression PDF, Multi page PDF/A Scan modes  FAX  Circuit PSTN, PBX Transmission speed Modern speed: maximum Resolution: standard Resolution: dpiton Single Page Risp Singl	vviildows@ eriviioriments	Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows® Server 2012R2, Windows® Server 2016. Windows® 7/8.1/10. Windows® Server 2008/2012/2012R2/2016. Windows® Server 2019					
SAP® environments Other supported environments  SCANNER  SCANNER  Scanning speed: ARDF Scanning speed: SPDF Resolution: maximum Compression method File formats  Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page High compression PDF, Multi page PDF/A  Scan modes  FAX  Circuit PSTN, PBX Transmission speed Pesolution: standard Resolution: standard Resolution: option Compression method File formats  Single Page TIFF, Single page JPEG, Single page High compression PDF, Multi page PDF/A, Multi page TIFF, Multi page High compression PDF, Multi page PDF/A  Scan modes  FAX  Circuit PSTN, PBX Transmission speed Saya.85 line/mm, 200x100 dpi Resolution: standard Resolution: option Tixt 15.4 line/mm, 400x400 dpi Compression method MH, MR, MMR, JBIG Scanning speed Stanning speed Sta	Mac OS environments						
Other supported environments  SCANNER  Scanning speed: ARDF Scanning speed: SPDF Scanning speed: SPDF Scanning speed: SPDF Scanning speed: SPDF Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page High compression PDF, Multi page PDF/A  Scan modes  FAX  Circuit PSTN, PBX Transmission speed Modem speed: maximum Resolution: standard Scanding Speed: maximum Resolution: option Scanning speed Standard S	UNIX environments						
SCANNER  Scanning speed: ARDF Scanning speed: SPDF Scanning speed: SPDF Resolution: maximum Compression method File formats Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page Multi page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page High compression PDF, Single page PDF/A  Scan modes  FAX  Circuit PSTN, PBX Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method MH, MR, MMR, JBIG Scanning speed 81 spm 68 spm Memory: standard 4 MB, (320 pages)	SAP® environments	SAP® R/3®, SAP® S/4®					
Scanning speed: ARDF Scanning speed: SPDF Resolution: maximum Compression method File formats Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page High compression PDF, Multi page PDF/A Scan modes FAX  Circuit PSTN, PBX Transmission speed Modem speed: maximum Resolution: standard Resolution: standard Resolution: option Compression method Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page PDF/A Multi page High compression PDF, Multi page PDF/A Scan modes  FAX  PSTN, PBX Transmission speed Modem speed: maximum Resolution: standard Resolution: standard Resolution: option MH, MR, MMR, JBIG Scanning speed 81 spm 68 spm Memory: standard 4 MB, (320 pages)	Other supported environments	IBM iSeries					
Scanning speed: SPDF Resolution: maximum Compression method File formats Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page Multi page High compression PDF, Multi page PDF/A Scan modes FAX  Circuit PSTN, PBX Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Stanning speed Stanning	SCANNER						
Resolution: maximum Compression method File formats Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page Multi page High compression PDF, Multi page PDF/A Scan modes FAX  Circuit PSTN, PBX Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Standard St	Scanning speed: ARDF		80 ipn	n (200/300 dpi)			
Compression method File formats Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page TIFF, Multi page TIFF, Multi page TIFF, Multi page PDF/A Scan modes  E-mail, Folder, USB, SD Card  FAX  Circuit PSTN, PBX Transmission speed Modem speed: maximum Resolution: standard Resolution: option Text Standard Resolution: option Text Standard MH, MR, MMR, JBIG Scanning speed 81 spm 68 spm Memory: standard 4 MB, (320 pages)	Scanning speed: SPDF						
File formats  Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi	Resolution: maximum						
Multi page High compression PDF, Multi page PDF/A           Scan modes         E-mail, Folder, USB, SD Card           FAX           Circuit         PSTN, PBX           Transmission speed         2 seconds           Modem speed: maximum         33.6 Kbps           Resolution: standard         8x3.85 line/mm, 200x100 dpi           Resolution: option         16x15.4 line/mm, 400x400 dpi           Compression method         MH, MR, MMR, JBIG           Scanning speed         81 spm         68 spm           Memory: standard         4 MB, (320 pages)	Compression method						
Scan modes         E-mail, Folder, USB, SD Card           FAX           Circuit         PSTN, PBX           Transmission speed         2 seconds           Modern speed: maximum         33.6 Kbps           Resolution: standard         8x3.85 line/mm, 200x100 dpi           Resolution: option         16x15.4 line/mm, 400x400 dpi           Compression method         MH, MR, MMR, JBIG           Scanning speed         81 spm         68 spm           Memory: standard         4 MB, (320 pages)	File formats	Single Page TIFF, Single page JPEG, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page PDF					
FAX           Circuit         PSTN, PBX           Transmission speed         2 seconds           Modern speed: maximum         33.6 Kbps           Resolution: standard         8x3.85 line/mm, 200x100 dpi           Resolution: option         16x15.4 line/mm, 400x400 dpi           Compression method         MH, MR, MMR, JBIG           Scanning speed         81 spm         68 spm         81 spm         68 spm           Memory: standard         4 MB, (320 pages)         68 spm         68 spm	Scan modes						
Circuit         PSTN, PBX           Transmission speed         2 seconds           Modern speed: maximum         33.6 Kbps           Resolution: standard         8x3.85 line/mm, 200x100 dpi           Resolution: option         16x15.4 line/mm, 400x400 dpi           Compression method         MH, MR, MMR, JBIG           Scanning speed         81 spm         68 spm           Memory: standard         4 MB, (320 pages)			L-mail, i oi	ddi, ddb, db daid			
Transmission speed         2 seconds           Modern speed: maximum         33.6 Kbps           Resolution: standard         8x3.85 line/mm, 200x100 dpi           Resolution: option         16x15.4 line/mm, 400x400 dpi           Compression method         MH, MR, MMR, JBIG           Scanning speed         81 spm         68 spm           Memory: standard         4 MB, (320 pages)			_	OTAL DDV			
Modern speed: maximum         33.6 Kbps           Resolution: standard         8x3.85 line/mm, 200x100 dpi           Resolution: option         16x15.4 line/mm, 400x400 dpi           Compression method         MH, MR, MMR, JBIG           Scanning speed         81 spm         68 spm           Memory: standard         4 MB, (320 pages)							
Resolution: standard         8x3.85 line/mm, 200x100 dpi           Resolution: option         16x15.4 line/mm, 400x400 dpi           Compression method         MH, MR, MMR, JBIG           Scanning speed         81 spm         68 spm         81 spm         68 spm           Memory: standard         4 MB, (320 pages)         68 spm         68 spm							
Resolution: option         16x15.4 line/mm, 400x400 dpi           Compression method         MH, MR, MMR, JBIG           Scanning speed         81 spm         68 spm         81 spm         68 spm           Memory: standard         4 MB, (320 pages)         68 spm         68 spm	•	·					
Compression method         MH, MR, MMR, JBIG           Scanning speed         81 spm         68 spm         81 spm         68 spm           Memory: standard         4 MB, (320 pages)         68 spm         68 spm				•			
Scanning speed         81 spm         68 spm         81 spm         68 spm           Memory: standard         4 MB, (320 pages)	·						
Memory: standard 4 MB, (320 pages)	•	81 spm			68 spm		
Manager ( marrier ( marrier )	• .	э. эр		•			
Memory: maximum 60 MB, (4,800 pages)	Memory: maximum		60 MB	, (4,800 pages)			
PAPER HANDLING	PAPER HANDLING						
Recommended paper size  Standard paper tray(s): SRA3, A3, A4, A5, A6, B4, B5, B6, Envelopes  Optional paper tray(s): SRA3, A3, A4, A5, A6, B4, B5, B6, Envelopes  Bypass tray: SRA3, A3, A4, A5, A6, B4, B5, B6, Envelopes, Custom Size paper (Width, Length)  Duplex tray:	Recommended paper size		Optional paper tray(s): SRA3, SRA3, A3, A4, A5, A6, B4, B5	A3, A4, A5, A6, B4, B5, B6, Envelopes, Custom Size pape	pes		
Paper input: standard 1,200 sheets	Paper input: standard						
Paper input: maximum 4,700 sheets							
Paper output: standard 500 sheets							
Paper output: maximum 1,625 sheets							
Paper weight Trays: (60 - 300 g/m²), Bypass: (52 - 300 g/m²), Duplex: (52 - 256 g/m²)		Trays: (60 - 300 g/m²), Bypass: (52 - 300 g/m²), Duplex: (52 - 256 g/m²)  Plain paper, Recycle paper, Special paper, Color paper, Letterhead, Cardstock, Preprinted paper, Bond paper, Coated paper					
Paper types Plain paper, Recycle paper, Special paper, Color paper, Letterhead, Cardstock, Preprinted paper, Bond paper, Coated paper, Gloss paper, Label paper, OHP	Paper types						

## RICOH IM C3000A/IM C3000/IM C3500A/IM C3500

MAIN SPECIFICATIONS

	IM C3000A	IM C3000	IM C3500A	IM C3500	
ECOLOGY					
Power consumption: max.	Less than 1,700 W				
Power consumption operation: B&W	503.3 W	503.3 W	532.9 W	532.9 W	
Power consumption operation: Full colour	559.7 W	559.7 W	598.6 W	598.6 W	
Power consumption: ready		47	7.6 W		
Power consumption: sleep		0.	55 W		
TEC*  * It is a reference value based on the ENERGY STAR Ver.3.0 test	0.34 kWh/week	0.34 kWh/week	0.39 kWh/week	0.39 kWh/week	

















RICOH @Remote

#### **OUTPUT TRAYS AND FINISHER OPTIONS**

1x 550-sheet paper tray	Paper size: (SRA3, A3, A4, A5, A6, B4, B5, B6), Paper weight: (60-300 g/m²)
2x 550-sheet paper tray	Paper size: (SRA3, A3, A4, A5, A6, B4, B5, B6), Paper weight: (60-300 g/m²)
2,000-sheet Large capacity tray	Paper size: (A4), Paper weight: (60-300 g/m²)
1,500-sheet side Large capacity tray	Paper size: (A4, B5), Paper weight: (60-300 g/m²)
1,000-sheet Hybrid finisher	Paper size: (SRA3, A3, A4, A5, A6, B4, B5, B6), Paper weight: (52-300 g/m²), Staple capacity: (50 sheets), Staple paper size: (A3, A4, B4, B5), Staple paper weight: (52-105 g/m²), Staple positions: (Top, Bottom, 2 Staples)
1,000-sheet Booklet finisher	Paper size: (SRA3, A3, A4, A5, A6, B4, B5, B6), Paper weight: (52-300 g/m²), Stack capacity: (1,000 sheets), Staple capacity: (50 sheets), Staple paper size: (A3, A4, B4, B5), Staple paper weight: (52-105 g/m²), Staple positions: (Top, Bottom, 2 staples, Booklet)
250-sheet Internal finisher	Paper size: (A3, A4, A5, A6, B4, B5), Paper weight: (52-300 g/m²), Stack capacity: (250 sheets), Staple capacity: (5 sheets), Staple paper size: (A3, A4, B4, B5), Staple paper weight: (64-80 g/m²), Staple positions: (Top)
500-sheet Internal finisher	Paper size: (A3, A4, A5, A6, B4, B5), Paper weight: (52-300 g/m²), Stack capacity: (500 sheets), Staple capacity: (50 sheets), Staple paper size: (A3, A4, B4, B5), Staple paper weight: (52-105 g/m²), Staple positions: (Top, Bottom, 2 staples)
Internal shift tray	Tray capacity: (250 sheets), Paper size: (SRA3, A3, A4, A5, A6, B4, B5, B6), Paper weight: (52-300 g/m²)
One-bin tray	Tray capacity: (125 sheets), Paper size: (A3, A4, A5, B3, B4), Paper weight: (52-300 g/m²)

#### OTHER OPTIONS

Fax unit, G3 Interface, Fax connection unit, Fax memory unit, Cabinet, Caster table, VM card, Memory unit, Side Tray, Banner paper guide tray, Punch units, Internal Multi-fold unit, Camera direct print card, PostScript 3, Bi-directional IEEE 1284, IEEE 802.11 a/g/n, Device server unit, File format converter, OCR unit, Enhanced security HDD, Data overwrite security unit, Small paper feeding unit, Page keeper, Imageable area extension unit, ADF handle, External keyboard bracket, Counter I/F unit, Key counter bracket, NFC card reader, Smart card reader built-in unit, EFI controller, EFI Impose, EFI Compose, EFI Hot folders, EFI Spot on

#### CONSUMABLES

Toner (black) 31,000 prints

Toner: cyan/magenta/yellow 19,000 prints

Consumable yield based on 3p/j
5% coverage on A4



# www.stanfordmarsh.co.uk

info@stanfordmarsh.co.uk | 0844 856 0701

COMMISSION REGULATION (EU) 2019/2020. The light source of this product is not intended for applications other than image printing.

#### Ricoh UK Ltd.

300 and 800 Pavilion Drive Northampton Business Park NN4 7YL Northampton United Kingdom



+44(0)1604 814900



www.ricoh.co.uk

